

## High Performance Winch TW 15000

### Technical Data


Motor:	2 x 6,8 HP / 12 VDC optional 2 x 8 HP and 24 VDC at extra charge
Relay:	waterproof IP 68
Drum bearing:	extra strong, sealed ball bearings
Free spool:	works pneumatically
Rope:	up to 100 m depending on strength, rope not included, delivery at extra charge
Versions:	Drum width 0,22 m or 0,31 m

Different ratios available for higher traction or higher rope speed.

We offer the following ratios: 0 %, 45 %, 70 % and 100 % faster than standard, which corresponds to a line speed of about 25 m to 50 m per minute (without load)  
Please note that as the speed increases the traction decreases at the same degree.

#### Special features:

Motors and drums additionally sealed.  
Reinforced brake shaft ISI 4340 steel, hardened and polished; HD gear set, gear set forged, hardened and polished for maximum precision and strength.  
The motors are additionally supported, frame with additional reinforcement made of stainless steel. Housing made of high performance 7075T6-alloy for unrivaled stability, anodised for additional corrosion protection.

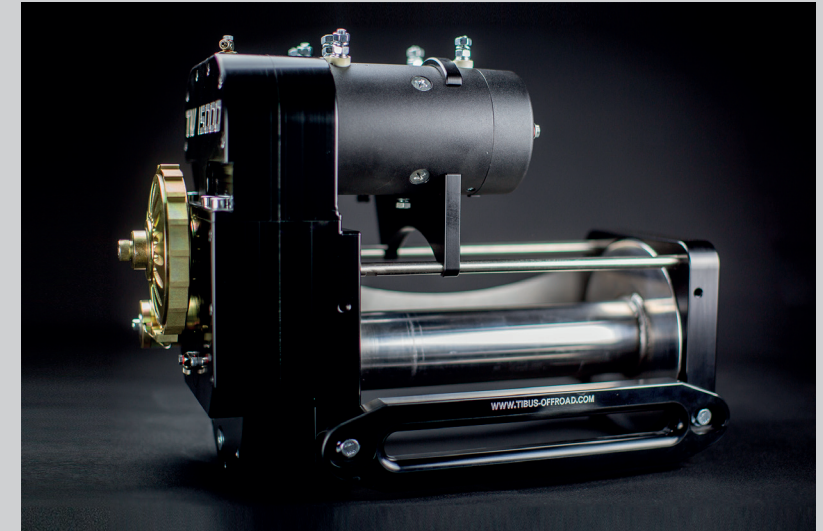

***Whatever you want, wherever you go...***

**TIBUS Offroad Ltd. & Co. KG**  
Roffhausener Landstrasse 25  
26419 Schortens  
Tel.: +49 (0) 4421 70 69 1  
Fax: +49 (0) 4421 70 19 10  
info@tibus-offroad.com  
www.tibus-offroad.com

